



SkyLine Rigid Border Tubing


SIDE VIEW

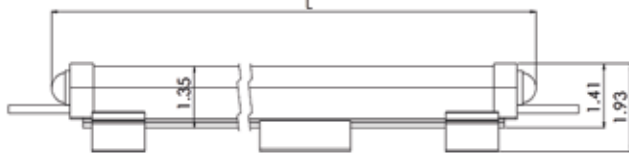

TOP VIEW

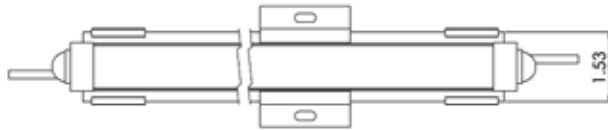

END VIEW

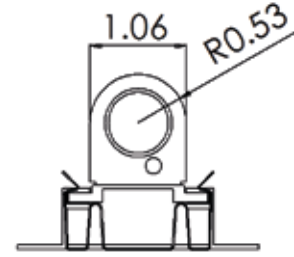


Installation hardware included but not attached.


- Operating Temp: -40° C to 70° C
- Protection Class: IP67
- Power Capability: Max combined footage 37' per Allanson 96W 24 VDC Power Supply (CV244-120-277)
- Standard Colors: **Red (RD)**, **Yellow (YL)**, **Lemon Yellow (MY)**, **Orange (OR)**, **Cool White (CW)**, **Blue (BL)**, and **Green (GR)**. [Custom colors upon request - minimum order quantity required]
- Installation Hardware: Stainless Steel Snap Clip, Aluminum Slide Clip, Wire Retainer Clip, Wire Nuts

Field Cutting Kit (ARBT-CUTKIT)

For on site cutting/adjustments.

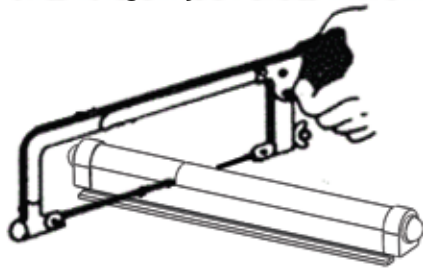

(Hacksaw and tools not included)

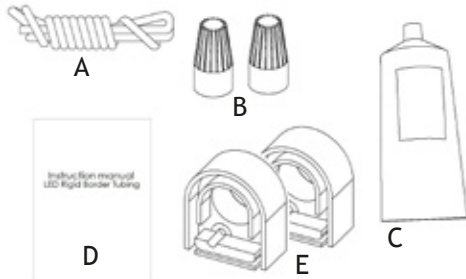


- (A. Bypass Jumper Wire B. Wire Nuts
- C. Loctite Superflex Silicone
- D. Instruction Manual E. Field End Caps)

Installation Hardware Kit (54-012B)

Additional installation hardware as required.




(Wire Retainer Clip x 1)



(Aluminum Slide Clip x 3)



(Wire Nut x 4)



(Stainless Steel Clip x 2)

For all your population services contact us at led@allanson.com



Specifications Guide



SkyLine Rigid Border Tubing

Part number	Total Length (inch) (Outside Diameter)	Imperial Fraction	Watt	Amps
ARBT-4XX	4.525	4 ¹ / ₂	0.48	0.02
ARBT-7XX	6.925	6 ¹⁵ / ₁₆	0.95	0.04
ARBT-9XX	9.325	9 ⁵ / ₁₆	1.43	0.06
ARBT-11XX	11.725	11 ³ / ₄	1.90	0.08
ARBT-14XX	14.125	14 ¹ / ₈	2.38	0.10
ARBT-16XX	16.525	16 ¹ / ₂	2.86	0.12
ARBT-19XX	18.925	18 ¹⁵ / ₁₆	3.33	0.14
ARBT-21XX	21.325	21 ⁵ / ₁₆	3.81	0.16
ARBT-23XX	23.725	23 ³ / ₄	4.28	0.18
ARBT-26XX	26.125	26 ¹ / ₈	4.76	0.20
ARBT-28XX	28.525	28 ¹ / ₂	5.24	0.22
ARBT-31XX	30.925	30 ¹⁵ / ₁₆	5.71	0.24
ARBT-33XX	33.325	33 ⁵ / ₁₆	6.19	0.26
ARBT-35XX	35.725	35 ³ / ₄	6.66	0.28
ARBT-38XX	38.125	38 ¹ / ₈	7.14	0.30
ARBT-40XX	40.525	40 ¹ / ₂	7.62	0.32
ARBT-43XX	42.925	42 ¹⁵ / ₁₆	8.09	0.34
ARBT-45XX	45.325	45 ⁵ / ₁₆	8.57	0.36
ARBT-47XX	47.725	47 ³ / ₄	9.04	0.38
ARBT-50XX	50.125	50 ¹ / ₈	9.52	0.40
ARBT-52XX	52.525	52 ¹ / ₂	10.00	0.42
ARBT-55XX	54.925	54 ¹⁵ / ₁₆	10.47	0.44
ARBT-57XX	57.325	57 ⁵ / ₁₆	10.95	0.46
ARBT-59XX	59.725	59 ³ / ₄	11.42	0.48
ARBT-62XX	62.125	62 ¹ / ₈	11.90	0.50
ARBT-64XX	64.525	64 ¹ / ₂	12.38	0.52
ARBT-67XX	66.925	66 ¹⁵ / ₁₆	12.85	0.54
ARBT-69XX	69.325	69 ⁵ / ₁₆	13.33	0.56
ARBT-71XX	71.725	71 ³ / ₄	13.80	0.58
ARBT-74XX	74.125	74 ¹ / ₈	14.28	0.60
ARBT-76XX	76.525	76 ¹ / ₂	14.76	0.62
ARBT-79XX	78.925	78 ¹⁵ / ₁₆	15.23	0.64
ARBT-81XX	81.325	81 ⁵ / ₁₆	15.71	0.66
ARBT-83XX	83.725	83 ³ / ₄	16.18	0.68
ARBT-86XX	86.125	86 ¹ / ₈	16.66	0.70
ARBT-88XX	88.525	88 ¹ / ₂	17.14	0.72
ARBT-91XX	90.925	90 ¹⁵ / ₁₆	17.61	0.73
ARBT-93XX	93.325	93 ⁵ / ₁₆	18.09	0.75
ARBT-95XX	95.725	95 ³ / ₄	18.56	0.77
ARBT-98XX	98.20	98 ³ / ₁₆	19.04	0.79

• XX in part number denotes color (RD, YL, MY, OR, CW, BL and GR).

